


3522 A / 3632 T / 4527 A 5533 A / 6543 A

TRAILER-MOUNTED BOOMS

TECHNICAL DATA

	3522 A	3632 T	4527 A	5533 A	6543 A
Working height	41 ft 9 in	43 ft 6 in	51 ft	61 ft 3 in	71 ft
Platform height	35 ft 9 in	37 ft 6 in	45 ft	55 ft 3 in	65 ft
Horizontal outreach (from centerline)	22 ft 6 in	32 ft	27 ft	33 ft 5 in	43 ft
Horizontal outreach (from edge of footpad)	17 ft 5 in	27 ft	21 ft	27 ft 4 in	37 ft
Up and over height	19 ft	N/A	20 ft 9 in	23 ft 1 in	24 ft 2 in
Lift capacity			500 lb		
A Length - stowed	16 ft 3 in	22 ft 8 in	20 ft 8 in	23 ft 8 in	24 ft
B Width stowed		5 ft 6 in		5 ft 7 in	5 ft 11 in
C Height stowed		6 ft 8 in		6 ft 9 in	7 ft
D x E Platform size		4 ft 1 in x 2 ft 9 in			
F Widest Point	11 ft 10 in	13 ft 9 in		14 ft 8 in	
G Widest Point	12 ft 2 in	13 ft 6 in		15 ft	
Turntable rotation		350° non-continuous			
Jib - length		4 ft 3 in			
Jib - Vertical Motion		150° (+70 / - 80)			
Tow speed rating		65 mph			
Leveling capability		12.5°			
Tire size	ST 225 / 75 D15		ST 225/75 R15		215/75R 17.5
Power source		4 x 115 V 245 amp-hr			
Tongue weight (no options)	245 lb	200 lb	290 lb	335 lb	550 lb
Weight (no options)	3,400 lb	4,400 lb	4,200 lb	4,800 lb	7,700 lb

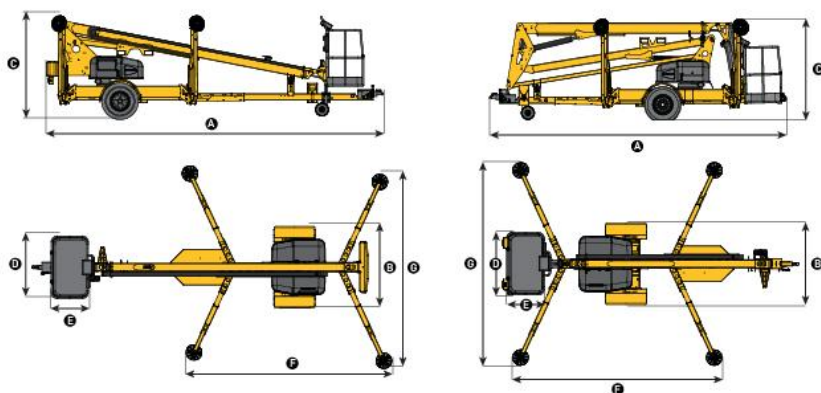

STANDARD EQUIPMENT

- > Hydraulic outriggers
- > Automatic leveling system and self-leveling platform
- > 110V GFI protected outlet to platform
- > Tilt alarm/sensor
- > Hour meter and battery condition indicator
- > Easy to use controls
- > Air and water line to platform
- > Inboard 25 amp charger
- > Integrated forklift pockets
- > Hydraulic surge brakes (trailer)

OPTIONS & ACCESSORIES

- > Spare tire and mounting kit
- > DC / Gas hybrid
- > Manual platform rotator - 120° stop point to stop point
- > Flashing beacon
- > Fluorescent tube caddy
- > Tool tray
- > Electric brakes (trailer)
- > Drive and Set (Not available on 3522 A & 6543 A)

